

ROTANO SOLAR

LED LUMINAIRE FOR STREET LIGHTING




TECHNICAL FEATURES

Body	Aluminium injection moulded body
Reflector	Special polycarbon reflector with narrow beam angle
Rated Power	25W / 35W
Light Source	Power LED
Input Voltage	24 V DC 50/60 Hz
Driver	25W model = Power Cons.: 26 W / Cos Ø > 0,9 35W model = Power Cons.: 40 W / Cos Ø > 0,9
IP Protection	IP 66
CRI	min. 65 (5000K)
Lumen	2720 lm / 3626 lm
Lumen/W	102 lm/W
Installation	Ø42, Ø48, Ø60 Horizontal Pole

ORDERING INFORMATION

Order No	Description	Product Code	Power cons. (W)	Dimensions (mm) (axb xh)	Weight (kg)
46084	ROTANO 3000K	RTN 6*PS42D-840WW/C-DC	26	505 x 215 x 90	7
46085	ROTANO 4000K	RTN 6*PS42D-900NW/C-DC	26	505 x 215 x 90	7
46086	ROTANO 5000K	RTN 6*PS42D-1040PW/C-DC	26	505 x 215 x 90	7
46087	ROTANO 3000K	RTN 9*PS42D-840WW/C-DC	40	505 x 215 x 90	7
46088	ROTANO 4000K	RTN 9*PS42D-900NW/C-DC	40	505 x 215 x 90	7
46089	ROTANO 5000K	RTN 9*PS42D-1040PW/C-DC	40	505 x 215 x 90	7

TECHNICAL DRAWING

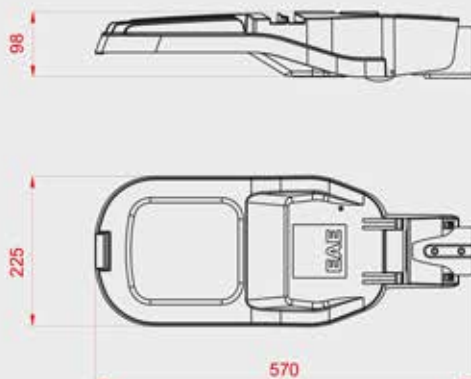

GENERAL FEATURES

- ✦ Energy saving
- ✦ Long Life
- ✦ Fast, easy and trouble free installation
- ✦ Light values stable (time-variant)

Applications

- ✦ Street - Open Car Park Area Lighting