

# ROTANO

## LED LUMINAIRE FOR STREET LIGHTING




### TECHNICAL FEATURES

<b>Body</b>	Aluminium injection moulded body
<b>Reflector</b>	Special polycarbon reflector with narrow beam angle
<b>Rated Power</b>	24W / 32W / 40W
<b>Light Source</b>	Power LED
<b>Input Voltage</b>	220-240 V 50/60 Hz
<b>Driver</b>	24W model = Power Cons.: 26 W / Cos $\phi$ > 0,9 32W model = Power Cons.: 35 W / Cos $\phi$ > 0,9 40 W model = Power Cons.: 44 W / Cos $\phi$ > 0,9
<b>IP Protection</b>	IP 66
<b>CRI</b>	min. 65 (5000K)
<b>Lumen</b>	2720 lm / 3626 lm / 4533 lm
<b>Lumen/W</b>	102 lm/W
<b>Installation</b>	$\varnothing$ 42, $\varnothing$ 48, $\varnothing$ 60 Horizontal Pole

### ORDERING INFORMATION

Order No	Description	Product Code	Power cons. (W)	Dimensions (mm) (axbxh)	Weight (kg)
46075	ROTANO 3000K	RTN 6*PS42D-840WW/C	26	505 x 215 x 90	7
46076	ROTANO 4000K	RTN 6*PS42D-900NW/C	26	505 x 215 x 90	7
46077	ROTANO 5000K	RTN 6*PS42D-1040PW/C	26	505 x 215 x 90	7
46078	ROTANO 3000K	RTN 8*PS42D-840WW/C	35	505 x 215 x 90	7
46079	ROTANO 4000K	RTN 8*PS42D-900NW/C	35	505 x 215 x 90	7
46080	ROTANO 5000K	RTN 8*PS42D-1040PW/C	35	505 x 215 x 90	7
46081	ROTANO 3000K	RTN 10*PS42D-840WW/C	44	505 x 215 x 90	7
46082	ROTANO 4000K	RTN 10*PS42D-900NW/C	44	505 x 215 x 90	7
46083	ROTANO 5000K	RTN 10*PS42D-1040PW/C	44	505 x 215 x 90	7

### TECHNICAL DRAWING

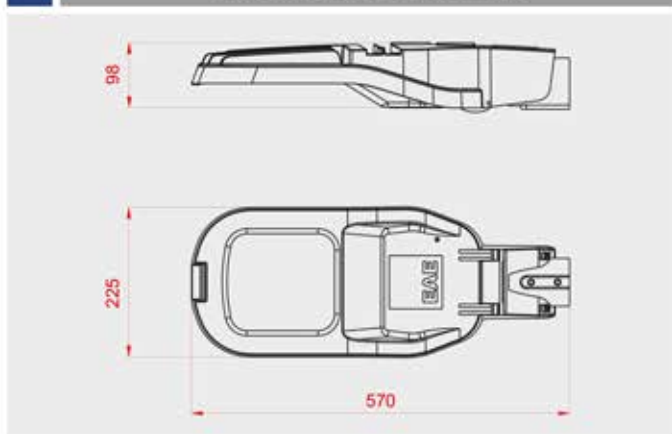

### GENERAL FEATURES

- ✦ Energy saving
- ✦ Long Life
- ✦ Fast, easy and trouble free installation
- ✦ Light values stable (time-variant)

#### Applications

- ✦ Street - Open Car Park Area Lighting

#### Products to be retrofitted

- ✦ 150 W MH
- ✦ 250 W MH