

ST1

LED LUMINAIRE FOR STREET LIGHTING



TECHNICAL FEATURES

Body	Aluminium injection moulded body
Optical Parts	Multi-lens with special beam angle
Rated Power	200W / 300W
Light Source	Power LED
Input Voltage	220-240 V 50/60 Hz
Driver	200 W model = Power Cons.: 200 W / Cos Ø > 0,9 300 W model = Power Cons.: 301 W / Cos Ø > 0,9
IP Protection	IP 66
Colour Temp.	5700K min.(CRI 65)
Installation	Vertical Ø76 Horizontal Ø60 Vertical Ø60 Horizontal Ø48

ORDERING INFORMATION

Order No	Description	Product Code	Power cons. (W)	Dimensions (mm) (axbxh)	Weight (kg)
46050	200W WIDE BEAM (4000K)	ST1 36*PS62D-550NW/CD	200	980x370x157	15
46052	200W WIDE BEAM (5000K)	ST1 36*PS62D-650NW/CD	200	980x370x157	15
46051	300W WIDE BEAM (4000K)	ST1 48*PS62D-550PW/CD	301	980x370x157	15
46053	300W WIDE BEAM (5000K)	ST1 48*PS62D-650PW/CD	301	980x370x157	15


GENERAL FEATURES

- ✦ Energy saving, Long Life
- ✦ Fast, easy and trouble free installation
- ✦ Light values stable (time-variant)

Applications

- ✦ Street
- ✦ Open Car Park Area Lighting

TECHNICAL DRAWING

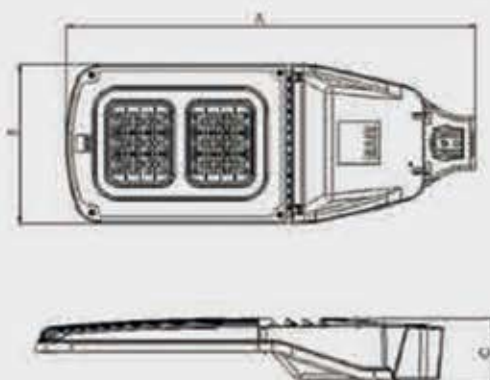

OPTIONS

- ✦ OPS.(4000K)

PRODUCTS TO BE RETROFITTED

- ✦ 250 W MH
- ✦ 400 W MH