

VERTA 12K



LED LIGHTING LUMINAIRE FOR INDUSTRIAL APPLICATIONS




TECHNICAL FEATURES

Body	Alumunium injection body
Body Color	RAL 9005 ve RAL 9007
Power Cons.	84 W - 112 W
Diffuser	Glare-free special high translucent diffuser / Frosted glass, Clear glass
Light Source	Power LED
Input Voltage	220-240V 50/60Hz
IP Protection	IP 65
Colour Temper.	4000K - 5700K
Installation	Pendant
CRI	min 70
Lumen	8524 lm / 10834 lm (5700K)
Lumen / W	97 lm/W / 105 lm/W (5700k)
Emergency Kit	Available
Dali Dim Comp.	Available

ORDERING INFORMATION

Order No	Description	Product Code	Power cons. (W)	Dimensions (mm) (axbxh)	Weight (kg)
44200	VERTA 84 W FROSTED GLASS (4000 K)	HBC 12*PS84U-NW/KCM	84	268 x 254	6,250
44201	VERTA 84 W FROSTED GLASS (5700 K)	HBC 12*PS84U-PW/KCM	84	268 x 254	6,250
44202	VERTA 84 W OPAL DIFFUSER (4000 K)	HBC 12*PS84U-NW/DF	84	268 x 254	6,250
44203	VERTA 84 W OPAL DIFFUSER (5700 K)	HBC 12*PS84U-PW/DF	84	268 x 254	6,250
44204	VERTA 112 W FROSTED GLASS (4000 K)	HBC 12*PS112U-NW/KCM	112	268 x 254	6,250
44205	VERTA 112 W FROSTED GLASS (5700 K)	HBC 12*PS112U-PW/KCM	112	268 x 254	6,250
44206	VERTA 112 W OPAL DIFFUSER (4000 K)	HBC 12*PS112U-NW/DF	112	268 x 254	6,250
44207	VERTA 112 W OPAL DIFFUSER (5700 K)	HBC 12*PS112U-PW/DF	112	268 x 254	6,250
44208	VERTA 84 W CLEAR GLASS (4000 K)	HBC 12*PS84U-NW/CCM	84	268 x 254	6,250
44209	VERTA 84 W CLEAR GLASS (5700 K)	HBC 12*PS84U-PW/CCM	84	268 x 254	6,250
44210	VERTA 112 W CLEAR GLASS (4000 K)	HBC 12*PS112U-NW/CCM	112	268 x 254	6,250
44211	VERTA 112 W CLEAR GLASS (5700 K)	HBC 12*PS112U-PW/CCM	112	268 x 254	6,250

TECHNICAL DRAWING

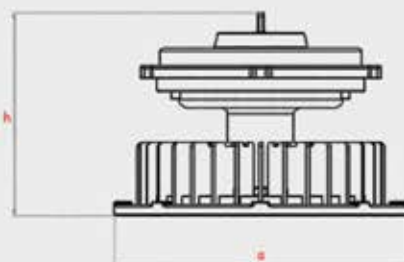

GENERAL FEATURES

- ✦ Energy-saving
- ✦ Light pollution free
- ✦ Fast, easy and trouble free installation
- ✦ Low lumen depreciation

Applications

- ✦ 5 -7m height ceiling