

PYRAMID Surface Mounted

PYRAMID is an advanced lighting system that produces an effective quality light for offices, health care facilities and retail spaces. Using an advanced technique of SMD LED it offers high light efficiency and colour rendering. An uncomfortable glare does not occur due to the special opal acrylic diffusers which simulate a light tone that is very close to natural daylight. While models with 3000K light colour temperatures provide a relaxing and welcoming environment, the 4000K models provide illumination that is motivating and inspiring when used in office spaces.

Colder in colour the 5000K model is the technical lighting solution for spaces where energetic and advanced technology is used or where a sense of hygiene is required.

PYRAMID surface mounted luminaires is designed in two different sizes and recessed mounted models are also available.



PYRAMID SURFACE MOUNTED LUMINAIRE

Technical Specifications

Body	: Sheet steel, electrostatic powder coated
Diffuser	: Opal acrylic
Rated Power	: 28W / 35W
Power Consumption	: 30W / 36W
Light Source	: SMD LED
Rated voltage	: 220-240 V 50-60 Hz
Degree of Protection	: IP 20
Light Colour Temp.	: 4000K Neutral White
Applications	: Surface mounted, pendant installation optional




Body Colour



RAL 9003

Technical Drawing

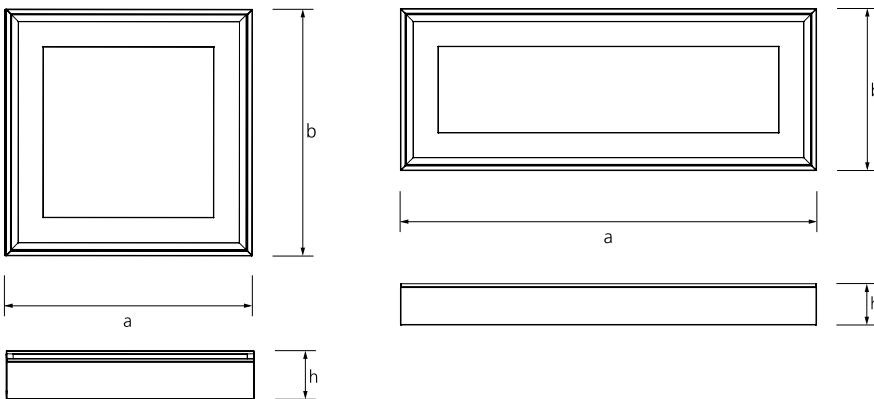

The energy cable can be connected very easily through a tool free operational tilt port.

PYRAMID Surface Mounted Ordering Table

Ordering Code	Descriptions	Product Codes	Power Consumption (W)	Dimensions (mm) axb xh	Weight (kg)
44417	28W 60x60 PYRAMID Surface Mounted (4000K)	PRM 448*C1U-NW/OD 60*60	30	595x595x98	5.5
44415	35W 60x60 PYRAMID Surface Mounted (4000K)	PRM 448*C2U-NW/OD 60*60	36	595x595x98	5.5
44426	35W 60x60 PYRAMID Surface Mounted DALI (4000K)	PRM 448*C2U-NW/OD 60 DALI	36	595x595x98	5.5
44416	35W 60x60 PYRAMID Surface Mounted Em. Kit (4000K)	PRM 448*C2U-NW/OD 60 Em. Kit	36	595x595x98	5.5
44418	35W 60x60 PYRAMID Surface Mounted DALI+Em. Kit (4000K)	PRM 448*C2U-NW/OD 60 DALI+Em. Kit	36	595x595x98	5.5
44441	28W 40x100 PYRAMID Surface Mounted (4000K)	PRM 448*C1U-NW/OD 40*100	30	997x388x98	5.5
44432	35W 40x100 PYRAMID Surface Mounted (4000K)	PRM 448*C2U-NW/OD 40*100	36	997x388x98	5.5
44433	35W 40x100 PYRAMID Surface Mounted DALI (4000K)	PRM 448*C2U-NW/OD 40*100 DALI	36	997x388x98	5.5
44434	35W 40x100 PYRAMID Surface Mounted Em. Kit (4000K)	PRM 448*C2U-NW/OD 40*100 Em. Kit	36	997x388x98	5.5
44435	35W 40x100 PYRAMID Surface Mounted DALI+Em. Kit (4000K)	PRM 448*C2U-NW/OD 40*100 DAL+Em. Kit	36	997x388x98	5.5