

LUXO

Cubical in design, LED technology, control systems that detect movement and emergency options all come together with LUXO.

The first notable feature is the original body and diffuser design. The body is made of polycarbonate and guarantees maximum strength. Specially selected high permeable diffusers and innovative SMD LED's are some of the reasons why LUXO is an effective lighting solution. Due to their movement sensor, they are an ideal solution in less circulated corridors.


Despite its compact structure, it contains a built-in battery system that continues to operate in emergency situations such as power failures. The emergency operational time of LUXO is 1 hour 30 minutes.



LUXO

Technical Specifications

Body	: Polycarbonate
Diffuser	: Special translucent opal polycarbonate
Rated Power	: 9W
Power Consumption	: 10W
Light Source	: SMD LED
Rated voltage	: 220-240V 50/60Hz
Degree of Protection	: IP 20
Colour Temperature	: 4000K Neutral white, 5000K Cool white
Assembly	: Surface mounted
Emergency Kit	: Available
PIR Sensor	: Available
Luminous Flux (lm)	: 640lm

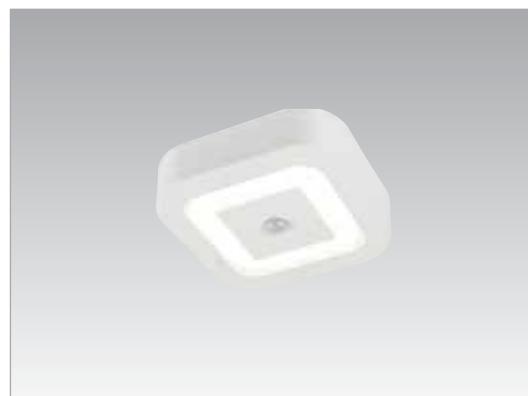


Body Colour



White

Technical Drawing

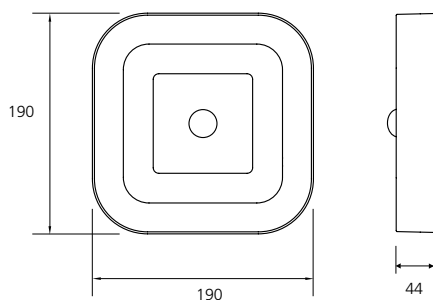

LUXO Ordering Table

Ordering Code	Descriptions	Product Codes	Power Consumption (W)	Dimensions (mm) axbxh	Weight (kg)
40104	LUXO (4000K)	LUX 108*OSR21U-NW/DF SOLO	10W	190x190x43,5	1
40108	LUXO (5000K)	LUX 108*OSR21U-PW/DF SOLO	10W	190x190x43,5	1